



# ENTERPRISE PROFILE

## 企业简介 ENTERPRISE PROFILE

Hebei Anbang Ornamental Iron Co., Ltd located in Shijiazhuang city, Hebei province, 260 km from Capital of Beijing. We are a professional manufacture in producing all cast and forged iron craft fittings. Over more than 14 years development, we have established long-term cooperation with hundreds of vendors which are from more than 30 countries and areas. In order to satisfy different customers' requirements and standards, we will continue to insist the innovative design and production capacity. Anbang factory in line with the business idea "honesty, keeping forging ahead", create "satisfied service", establish "brands vividly". All the staffs will continue to bring forth new idea hardly and with the first-class products and high quality, service to face the customers.

Main production:

### A. Supply Customization

Can make all kinds of cast, forged and stamping items as your drawing or sample. We can also do re-processing and surface treatment, such as painting as your requirements.

### B. Iron Decoration Parts

We manufacture all kinds of iron decoration flowers, leaves, spears, collars, connections, gate decoration, welding panels, scrolls, rosettes, handrail, fence, gate, window and etc. More than 1000 designs are available now.

### C. Wrought iron machine and moulds

Electronic Machine: Multi-purpose metal Craft Tool Set, Cold rolling embossing machine, Steel cutting machine, Metal high frequency induction heating machine, Hot-roll fishplate mill, Iron art rolling twisting machine, Program controlled metal bending machine, Twisting machine, Metal craft pipe bender, Punching press machine, Air hammer, and all the mould that fit for the machine.

河北安邦铁艺制品有限公司地处华北平原河北省石家庄市境内，距首府北京260公里。位于冀203省道无繁线16公里处。西距石家庄机场18公里，东距无极县城18公里，是专业生产各种铸造及锻造产品的生产厂家。经过十多年的发展，已先后和三十多个国家和地区的上百家厂商建立了贸易关系。我们将不断加强科研设计及生产能力，根据各区域客商不同的技术要求和标准，提供各类规格的铸造及锻造产品。我们本着“诚实守信、开拓进取”的经营理念，创“优质服务”，造“锻铸精品”，树“品牌形象”。全体员工将不断努力创新，以一流的产品、优质的服务面对广大客户！

### 一、定制加工

按照客户图纸或来样生产各类铸造，锻造及冲压件。可以按客人要求对产品进行再次加工，或对表面进行各种处理，如喷涂等。

### 二、铁艺装饰件

生产各类装饰性铁艺花叶，矛头，接头，连接件，门饰，焊接加工组合件，标准弧，花盘，楼梯扶手，栅栏大门，窗花，铁艺家私等，现有上千种花型供客户选择。


### 三、铁艺加工设备及模具

电动设备：铁艺设备一体机、冷轧压花机、钢材切断机、铁艺高效加热机、鱼尾纹机、钢材端头搓卷机、弯弧机、扭拧机、液压成型机、弯管机、冲床、空气锤及机械配套模具。



## HBAB-LZ80 型冷轧压花机

### Cold Rolling Embossing Machine

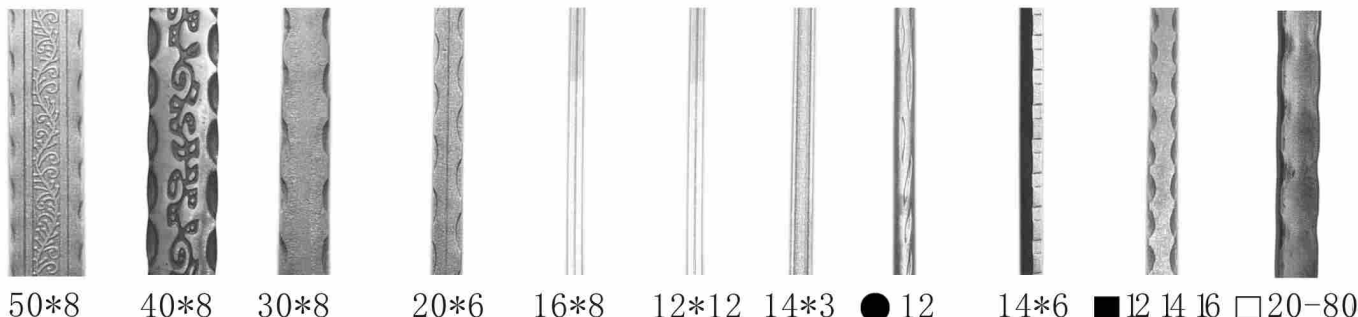


项目Item	HBAB-LZ80 型冷轧压花机 Cold Rolling Embossing Machine	
最大加工能力 Max Processing Capacity	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 5px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 5px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-bottom: 5px;"></div> <div style="width: 10px; height: 10px; border: 1px solid black; margin-bottom: 5px;"></div> </div> <div> <math>\leq 80\text{mm} \times 10\text{mm}</math>  <math>\leq 30\text{mm} \times 30\text{mm}</math>  <math>\leq \Phi 35</math>  <math>\leq 80\text{mm} \times 80\text{mm}</math> </div> </div>	
冷轧时速 Rolling Speed	10 meter/minute	
电机性能 Motor Performance	功率 Power (KW) 5.5 电压 Voltage (V) 380 频率 Frequency (HZ) 50/60	
加工性能 Processing Performance	<p>1. 该机是冷轧生产铁艺用锻料的专用机械，可冷加工生产各种规格的锻花扁铁、方钢、圆钢、方管。 This machine is the special equipment for producing forging materials. It can process various cold forged flower flat iron, square steel, round steel, square tube.</p> <p>2. 本机采用模块式组合结构，设计合理，技术先进。 The machine adopts modular combination structure with reasonable design and advanced technology.</p> <p>3. 设有变频装置，可随意调节冷轧速度，以适应不同规格的材质。 Equipped with frequency conversion device so that cold rolling speed can be adjusted to meet the different specifications of the material.</p> <p>4. 生产效率高，每分钟可冷轧10米钢材。 High production efficiency, rolling speed up to 10 meters per minute.</p> <p>5. 轧制纹路清晰美观，阴纹和阳纹扁铁均可冷轧。 Rolled lines are clear and beautiful. Both concave and convex flat iron can be cold rolled well.</p> <p>6. 设有调平、调直装置，综合加工性能好。 The machine is equipped with leveling, straightening device. Comprehensive processing performance is good.</p> <p>7. 手动控制和脚踏开关控制兼有，操作方便，安全可靠。 Specially designed both manual control and foot switch control, making the operation easy, safe and reliable.</p> <p>8. 更换模具方便、省时、省力。 Replace the mold conveniently, time-saving, labor-saving.</p> <p>9. 随机配套13套模具。多种模具，可供选购，还可协助用户设计和制作模具。 Matching 13 sets of mold. Not only a variety of mold, available for purchase, but also to assist users in the design and production of mold.</p>	
包装尺寸 Packing Size (mm)	L×W×H=1570×630×1300/850×530×480	
净重/毛重 N. W. (kg)/G. W. (kg)	1060/1210	



## HBAB-H16A型液压成型机


### Electric Hydraulic Molding Machine

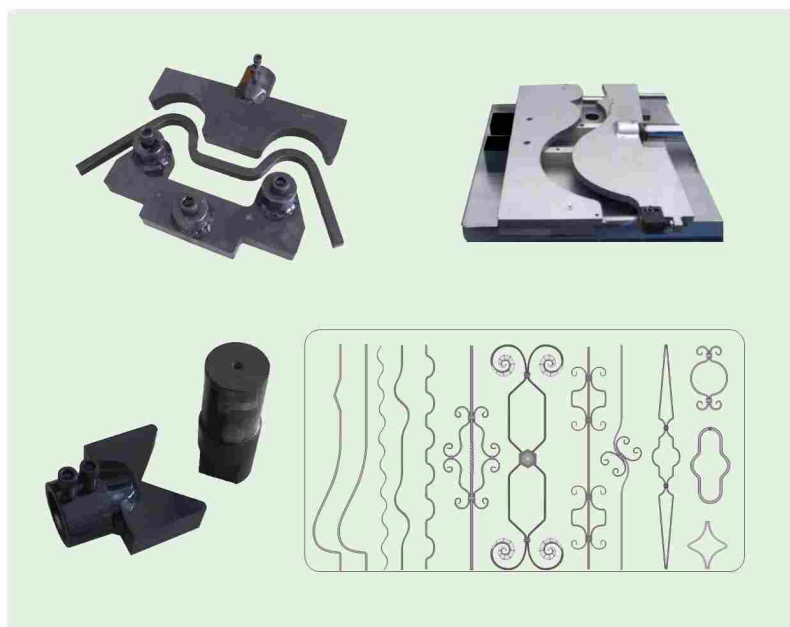

项目Item	HBAB-H16A 液压成型机 Electric Hydraulic Molding Machine	
最大加工能力 Max Processing Capacity	■	≤10mm×50mm
	●	≤φ16mm
	■	≤16mm×16mm
电机性能 Moter Performance	7.5KW 380V 50HZ 工作压力 Working pressure: 200KN 工作行程 Operating Stroke: 250mm	
加工性能 Processing Performance	<p>1. 本机可完成异形铁艺工件的一次加工成型，铁艺工艺一致性好评，可实现批量生产，工作效率高。 Hydraulic bending machine is an indispensable equipment for wrought iron factories. With staple performance and high efficiency, HBAB-H16A is suitable for massive processing of wrought iron components.</p> <p>2. 机械设计结构合理，便于操作，便于维护，模具、夹模更换方便。 With the advanced technology, the machine is easy to be managed, and maintained.</p> <p>3. 手动控制和脚踏开关控制兼有，操作方便，安全可靠。 Both hand and foot controllers available, enhancing the convenience and safety.</p> <p>4. 工作台面尺寸、定位设计合理，确保铁艺行业90%以上的折弯变形尺寸适用。 The larger working area and the reasonable design ensure 90% of wrought iron designs can be processed by this machine.</p> <p>5. 机身后带散热孔。 Vents available at the back of the machine.</p> <p>6. 设有压力表。 Pressure gauge available.</p>	
包装尺寸 Packing Size(mm)	L×W×H=1250×620×1100	
净重/毛重 N. W. (kg) / G. W. (kg)	550/600	

# HBAB-LZF 60 扶手管机

## Handrail Tube Machine

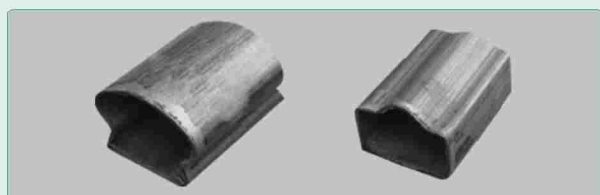

项目Item	圆管○ Round Tube	扶手管尺寸 Handrail Tube Size (mm)
加工尺寸 Produce Size (mm)	Φ48	 60*27
	Φ60	 60*42
		 55*43
		 65*40
	Φ75	 80*55
		 70*52
	Φ89	 100*58
	Φ63.5	 66*43
	Φ50.8	 64*30
	Φ63.5	 75*42
	Φ76.2	 100*55
加工性能 Processing Performance	<p>1. 操作简单、方便，一次性加工成型，可实现批量生产，工作效率高。 The machine can be easily managed and efficiently operated. The high efficiency makes it suitable for massive production.</p> <p>2. 本机轧辊选用冷轧模具钢，使用寿命长。 Cold-rolling steel is applied to the dies, which has extended the life-span of the dies.</p> <p>3. 加工范围广，不锈钢、镀锌管都可以加工。 The machine can be applied to a wide range of pipes, including stainless steel, and galvanized pipes.</p>	
功率 Specification of Motor	5.5 KW 380V 3PH	
包装尺寸 Packing Size (mm)	L×W×H=3200×1100×700	
净重/毛重 (kg) N.W. (kg)/G.W. (kg)	2400/2500	





## HBAB-PCW 电动程控弯花机


Electric Program Control Bending Machine



项目Item	HBAB-PCW-1		HBAB-PCW-2
最大加工能力 Max Processing Capacity		$\leq 50\text{mm} \times 8\text{mm}$ $\leq \phi 16\text{mm}$ $\leq 16\text{mm}$	$\leq 50\text{mm} \times 10\text{mm}$ $\leq \phi 20\text{mm}$ $\leq 20\text{mm}$
电机性能 Motor Performance	3KW 380V		4KW 380V
加工性能 Processing Performance	<p>1. 采用西门子PLC控制系统，系统成熟，比起固态继电器使用周期要长，维修方便。 SIMATIC Controller-PLC have been implemented in our machines. They are advanced, fast, long life-span and easy to be managed comparing to those machines with different systems.</p> <p>2. 动力盘整体一次锻打，经久耐用；而且动力盘由160mm加大到200mm，弯花能力大。 The 200mm base has empowered the molds and extended their life-span.</p> <p>3. 无偏心轴，卡料部分设计为不规则三边形模具，操作更加方便，可多面使用，提高利用率。 The eccentric shaft was replaced by a scalene triangle, which makes the moulds more convenient and more efficient when bending steel.</p> <p>4. 模具为双层一体模具，使用寿命长。 Dies are two (base and holder) in one rather than the common welded ones, they can rarely be broken.</p> <p>5. 阻挡车内置轴承，更加稳定，避免使用铜套时出现缺油无法使用的现象。 A shaft is put inside the barrier, making it more stable, and avoiding the machine stops when lacking of oil.</p> <p>6. 运转速度快（不可调节），配有刹车开关和全铸铝脚踏开关，使机身稳定性加强，效率提高。 The Brake and cast aluminum foot switch makes the machine safe and stable while operating fast.</p> <p>7. 电源与电箱隔离，配备单独的配电箱，安全性能增加。 The electric box is isolated with the power pack, making the machine safer.</p> <p>8. 操作语言可选择，分别为：中英/中俄。 Multiple language available (Chinese, English, Russian).</p> <p>9. 电路板配件为国标件，世界通用，方便更换。 PCB accessories are all according to the international standard, same all over the world, which is convenient to be fixed or changed when in trouble.</p>		
包装尺寸 Packing Size (mm)	L×W×H=800×560×1100/860×620×1200		
净重/毛重 N. W. (kg) / G. W. (kg)	230/280		230/280

# HBAB-WZP 金属加热机

## Metal Highfrequency Induction Heating Machine



项目Item	WZP-20	WZP-40	WZP-60	WZP-80
最大输出功率 The Maximum OutputPower (kw)	10KW	20KW	30KW	50KW
输出电压 Output Voltage	220v±10% 50HZ~60HZ	380v±10% 3P. 4W	380v±10% 50HZ~60HZ	380v±10% 3P. 4W
输入电流 Input Current	4-20	6-40	6-50	8-60
输出振荡频率 Output Frequency of Oscillation	30-70PHz	30-60PHz	15-30PHz	10-30PHz
持续率 Continuous Load Rate	100%	100%	100%	100%
冷却水要求 Cooling Water Requirements	0.03~0.1MPa≤50°	0.03~0.15MPa≤50°	0.05~0.1MPa≤50°	0.05~0.5MPa≤50°



## HBAB-F4 端头成型机

End Forming Machine





HBAB-PCW-1

项目Item	HBAB-F4 端头成型机 End Forming Machine	
最大工作性能 Max Processing Capacity	■	≤16mm×60mm
	●	≤φ16mm
	■	≤16mm×16mm
电机性能 Motor Performance	3KW 220V/380V 50HZ	
加工性能 Processing Performance	<p>1. 模具料为H13热轧模具钢，轴为40钢，硬度高，韧性好。 Mold material for the H13 hot-rolled die steel, shaft for the 40 brand, high hardness, good toughness.</p> <p>2. 带除灰孔，清理和操作起来更加方便； 齿轮外挂，方便清洁。HBAB-PCW-2 The dust removal hole brings convenience when cleaning the dust; Outside gear wheel, easy to be cleaned and fixed.</p> <p>3. 电机外配电机罩，安全性能更高。 The Cover outside the motor makes the machine safer. 4KW 380V</p> <p>4. 内置止倒卡簧，防止因辊轮倒回造成的辊轮松动。 Built-in stopper to prevent loosening of the rollers caused by the roll back.</p> <p>5. 后阻挡板设有定位装置，可按产品需要预先设定进料尺寸，取得最佳轧制效果。 On the back of holdup plate of the machine, there is a rolling size localization device, according to the product needs to set the feed size in advance to obtain the best rolling effect.</p> <p>6. 本机由轧辊偏心改为轴偏心，轧辊使用寿命延长三倍。 This machine, the roll eccentricity is changed into a shaft eccentricity, the working life of the roller is three times than others.</p>	
包装尺寸 Packing Size (mm)	L×W×H=1055×570×1180	
净重/毛重 N. W. (kg) / G. W. (kg)	270/330	



# HBAB-DCJ-A 电动搓卷机

Electric Curl Rolling Machine

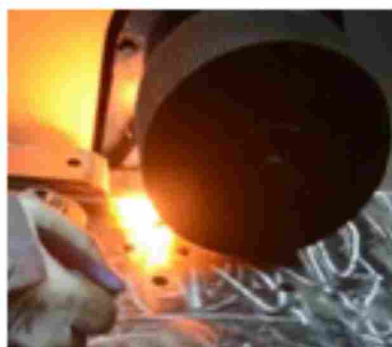

项目Item	HBAB-DCJ-A电动搓卷机 Electric Curl Rolling Machine	
最大加工能力 Max Processing Capacity	■	≤10mm×30mm
	●	≤φ16mm
	■	≤16mm
电机性能 Motor Performance	3KW（两个电机）（two motors） 380V 3PH/50HZ	
加工性能 Processing Performance	<p>1. 采用专利传动技术，防撞车，工作稳定。 The use of patented transmission technology, stable working.</p> <p>2. 入料，退料方便。 It is easy to feed-in and take off the material.</p> <p>3. 采用西门子PLC控制面板，性能稳定，可靠，方便维修。 Using Siemens PLC control panel, stable performance, reliable, easy maintenance.</p> <p>4. 内置变频器，可调速，大大提高工作效率。 Frequency converter inside, adjustable speed, greatly improving work efficiency.</p> <p>5. 独特模具设计可实现超大直径成型。 Unique mold design can achieve large diameter forming.</p> <p>6. 两个电机，工作效率是一般搓卷机的两倍。 The machine is equipped two motors, so that the efficiency is twice than others.</p>	
包装尺寸 Packing Size (mm)	L×W×H=1090×590×1115	
净重/毛重 N. W. (kg)/G. W. (kg)	300/350	





## HBAB-DCJ-C 电动搓卷机 Electric Curl Rolling Machine

项目 Item	HBAB-DCJ-C电动搓卷机 Electric Curl Rolling Machine	
最大加工能力 Max Processing Capacity		≤10mm×30mm
		≤φ16mm
		≤16mm×16mm
电机性能 Motor Performance	功率Power (KW)	1.5KW
	转速Rotational speed (r/min)	1400
	电压Voltage (V)	220/380
	频率Frequency (HZ)	50HZ/3PH
加工性能 Processing Performance	1. 采用专利传动技术，防撞车，工作稳定。 The use of patented transmission technology, stable work. 2. 入料，退料方便。It is easy to feed-in and take off the material. 3. 成卷质量高，一致性好，可实现批量生产。High quality rolling and consistency, it can produce in batch.	
产品尺寸/包装尺寸 Package Size (mm)	L×W×H=1030×530×1175	
净重/毛重 N. W/G. W (kg)	250/320	

项目Item	HBAB-B1电动圆弧机 Pipe Circling Machine		
最大加工能力 Max Processing Capacity	□	≤15×15mm-80×80mm	
	○	≤φ22mm	
材料壁厚 Material Thickness	1mm-2.5mm		
电机性能 Motor Performance	1.5KW	380V	50HZ
加工性能 Processing Performance	1. 本机器不需要更换模具，可任意调节管的大小，不受限制。 This machine no need to change the molds, can adjust the size at any size from 15mm-80mm. 2. 弯管机三轴同心同面。 It ensures that the three shaft are concentric and coplanar. 3. 能保证弯管成品在一个水平面上。 We can let the pipes in the same level after bending. 4. 通过压低中间的那根轴，此机器可以弯出不同直径的的弧和圆。 You can get different sizes arcs or circles through pressing down the		
包装尺寸 Packing Size(mm)	L×W×H=900×480×1275		
净重/毛重 N. W. (kg) /G. W. (kg)	300/350		

## HBAB-B1电动圆弧机 Pipe Circling Machine



## HBAB-AK-3 多功能 一体机

### Multi-Purpose Metal Craft Tool Set

项目Item	HBAB-AK-3多功能一体机 Multi-Purpose Metal Craft Tool Set		
最大加工能力 Max Processing Capacity	弯圆尺寸 Circling Size		≤30mm×10mm
			≤Φ16
			≤32×2.5
			≤40mm×40mm×3mm
	弯弧尺寸 Scrolling Size		≤Φ14
			≤16mm×16mm
			≤30mm×10mm
	折角尺寸 Angle-Bending Size		≤Φ16
			≤16mm×16mm
			≤30mm×10mm
	扭拧尺寸 Twisting Size		≤16mm×16mm
电机性能 Motor Performance	功率 Power		2.2KW
	电压 Voltage		220V/380V (3PH)
	频率 Frequency		50HZ/60HZ
加工性能 Processing performance	HBAB-AK-3多功能金属工艺机是一种综合性很强的加工机械。它具有弯圆、弯弧、扭拧、折角及将圆钢、方钢、扁钢或钢管加工成其它形状的整合功能。 HBAB-AK-3 Multifunctional Metal Craft Machine is a comprehensive machine with such integrated functions as circle-forming, scrolling, twisting, angle-bending and other shaping of either round, square or flat steel or pipes.		
包装尺寸 Packing Size(mm)	L×W×H=1550×700×1270		
净重/毛重 N. W. (kg)/G. W. (kg)	500/550		







# 电动扭拧机

## Electric Twisting Machine

项目Item	25C
扭拧最大尺寸 Max. twisting size (mm)	25×25
花篮扭拧最大尺寸 Lantern twisting size (mm)	(5×5 6×6 7×7 8×8 10×10)×4P≤H270×90 (4×4 5×5 6×6 7×7 8×8)×8P≤H270×105
输出转速 Output Rotational Speed R/min	13
电机 Functions of Motor	3KW/50HZ/380V 3PH
加工性能 Processing Performance	<p>1. 除具备25B的所有的特点外，这台机器增加了扭拧花篮的功能。 With all the characteristics of 25B, this machine also has the function of Producing basket or Lantern.</p> <p>2. 液压助力，动力大稳定性好。 Hydraulic booster, stronger power, more stable.</p> <p>3. 加工强度大，最大可扭拧25×25的方钢；10×10四股花篮和8×8八股花篮。 The bigger processing strength has increased the MAX processing capacity up to 25×25 square steel; 10×10 4P basket and 8×8 8P basket.</p>
包装尺寸Packing Size (mm)	L×W×H=1570×720×1250
净重/毛重N. W. (kg)/G. W. (kg)	550/600






项目Item	电动程控扭拧机 HBAB-ET25A Electric Twisting Machine	
最大加工能力 Max Processing Capacity	长度 Length	≤200-800mm 800mm以上可分段拧 800mm or longer can be processed by section.
	规格 Specifications	■ ≤25mm×25mm ■ ≤6mm×30mm
电机性能 Motor Performance	3.0KW 380V 50HZ 6A	
加工性能 Processing performance	<p>1. 程序控制，自动校正，确保产品加工的统一性，同时减少了工作时间和劳动强度。 By applying the advanced program-controlled and auto-correction system, the unitarity is improved, which has significantly minimized the working time and labor involvement.</p> <p>2. 主轴转速均匀，确保在弯曲较粗和较细型材时，机器能最有效的发挥其功能作用。 With the even speed, this machine can release its full capacity when processing the materials with different thickness.</p> <p>3. 模具更换简便，时间短，只需2~8秒的时间。 Different dies can be switched conveniently (within 2-8 seconds).</p> <p>4. 加工强度大，最大可扭拧25×25的方钢。 The bigger processing strength has increased the MAX processing capacity up to 25×25 square steel.</p>	
净重/毛重N. W. (kg) /G. W. (kg)	430/480	
包装尺寸 Packing Size (mm)	L×W×H=1570×720×1250	




## 冲床

### J23 SERIES PRESS MACHINE

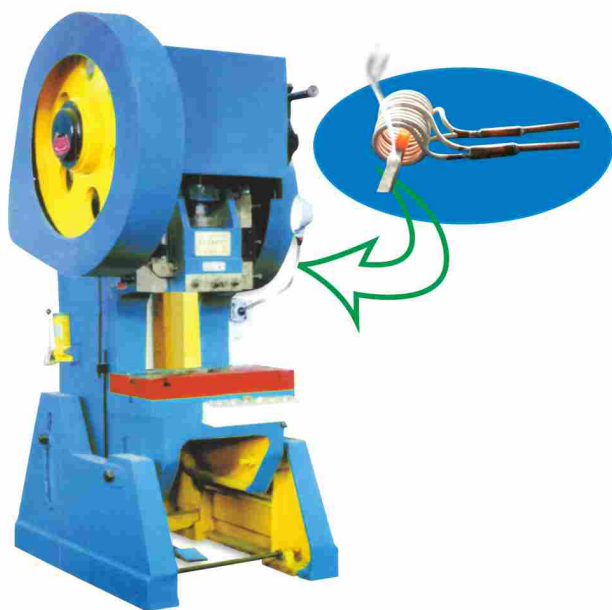

## 空气锤

### Air Hammer

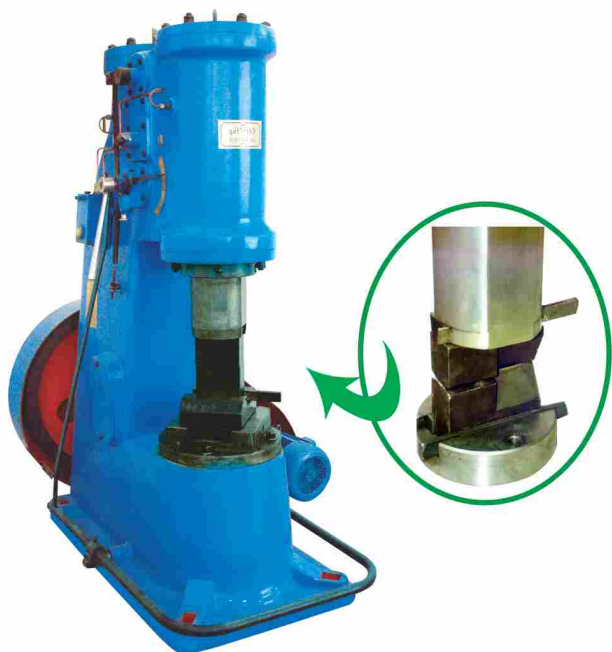

TYPE	J23-25T	J23-40T	J23-63T	J23-80T	J23-100T	J23-125T
Force (KN)	250	400	630	800	1000	1250
Force Course (mm)	2.5	4	4	5	7	8
Sliding block course (mm)	70	80	100	112	120	140
Course Times (T/M)	70	55	56	45	50	35
Mount-die Height (mm)	200	240	300	275	300	280
Mount-die Height adjust (mm)	40	56	63	71	80	90
Distance from machine body to sliding block center (mm)	210	235	245	250	305	325
Size of padding (mm)	320/500	370/635	410/640	440/740	510/810	650/1020
Forward and back/left and right						
Max. inclining angle (°)	15	25	25	25	20	15
Die hand lehole size (mm)	Φ40	Φ50	Φ50	Φ60	Φ60	Φ70
Thickness of padding (mm)	50	80	90	100	100	105
Board hole size of padding (mm)	Φ130	Φ135	Φ140	Φ160	Φ160	Φ160
Power (kw)	2.2	4	4	7.5	11	15
Two columns distance of machine body (mm)	240	250	280	320	390	385
External Size (LxWxH) (mm)	900x700x2000	1400x1000x2300	1700x1150x2450	2000x1300x2550	1950x1400x2650	2150x1550x3170
Machine Weight (kg)	1500	2700	4200	5900	6500	9500
Basic size (mm) Forward and back/left and right	640/530	1100/640	1150/680	1160/750	1300/840	1575/945
Throat Height (mm)	320	410	490	500	535	525


Item	C41-25	C41-40	C41-75
Attack energy (j)	27	53	100
Work sector altitude (mm)	240	245	300
Number of blows per minute (min-1)	250	250	210
Maximum square steel can be forged (mm)	40x40	52x52	65x65
Maximum round steel can be forged (mm)	Φ48	Φ68	Φ85
Rate power of motor (kw) 1440r. p. m	3	4	7.5
Tatal weight of the hammer (kg)	760	1300	2800
External size (mm)	1100x500x1300	1100x500x1300	1100x500x1300



## 压力机

### JG-YL Press Machine

项目Item	JGYL-30	JGYL-50	JGYL-80
最大工作压力 Max Working Pressure	300KN	500KN	800KN
最大加工范围 Max Working Travel	300mm	350mm	400mm
最大工作空间 Max Working Space	250mm	300mm	350mm
加工性能 Processing performance	<p>此压力机主要是用来生产包扣等零件，它可以实现入料和一次成型，非常的方便可靠。</p> <p>This producing-button machine mainly use for producing button spare parts, it can finish feeding material and making design once. It is very convenient and reliable.</p>		

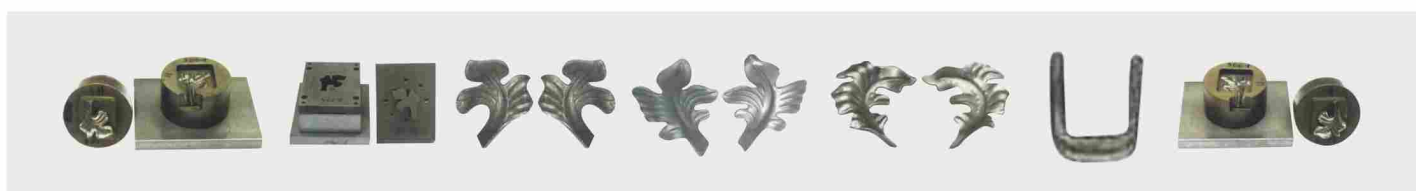

## HBAB-QD40 钢材切断机

### Steel Cutting Machine




项目Item	类型Type	HBAB-QD40
最大加工能力 Max Processing Capacity	●	≤Φ40mm
	■	≤32mm×32mm
	◆	≤30mm×30mm
	—	≤70mm×15mm
加工性能 Processing Performance	<p>作为应用于建筑和其它金属工艺相关行业的理想工具，可以将圆形，方形或扁钢、角钢以旋转方式切割成块。</p> <p>As an ideal tool to be applied in architecture and other metal craft-related industries, can shear round, square or flat steel angle steel into pieces in a rotating way.</p>	
功率 Specifications of Motor	2.2KW 380V	
包装尺寸 Packing Size (mm)	L×W×H=1190×540×680	
净重/毛重 (kg) N.W. (kg)/G.W. (kg)	460/ 490	



## HBAB-PC花管机



### Pipe Embossing Machine

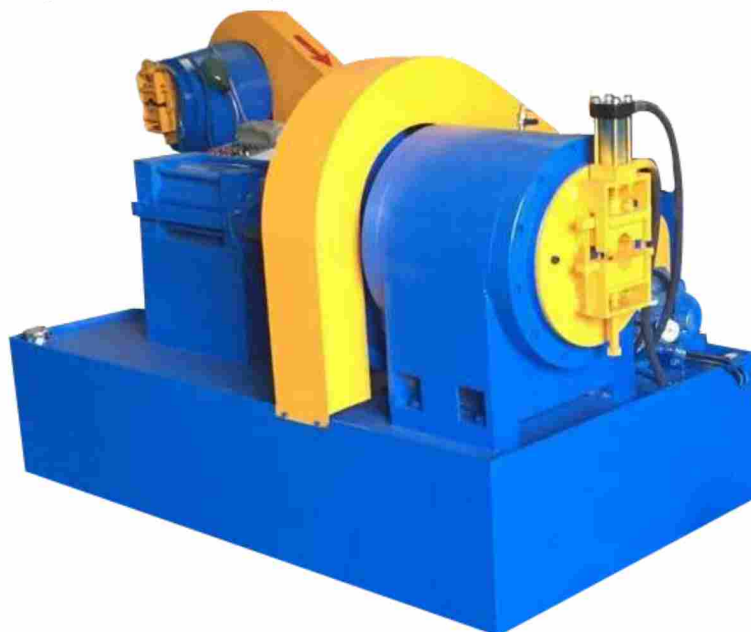

项目Item	32型 (TF-5)	50型 (TF-6)	76型 (TF-7)
模具尺寸(WX LX H) Die Size	36X300X55	50X300X75	60X400X60
加工范围(mm) Processing Range (mm)	Φ12-Φ15	Φ25-Φ51	Φ51-Φ76
工件壁厚 (mm) Work Piece Thickness (mm)	0.2-0.5	0.2-1.2	0.4-1.5
成形长度 (mm) Forming The Length Of (mm)	290	290	290
成型时间 (S/次) Forming Time	3-12	3-20	8-30
减轻楔行程式 (Ma) Reduce The Wedge Line Program	180	200	250
模具开闭量 (Max) Amount Of Mold Opening And Closing	28	30	40
主电机 (KW) Main Motor (kw)	3	4	7.5
主轴转速 (转/分) Spindle Speed (rev, Min)	300	200	200
主轴中心高度 Spindle Center Height	800	800	800
加工性能 Processing Performance	花管成型机采用国外先进的技术，可对铁管、铝管等管材进行加工，管径在（中12-中114毫米）厚度（0.3-2毫米），具有各种不同规格的模具满足客户需求。 This pipe embossing machine, also known as flower tube molding machine, the use of foreign advanced technology, iron tube, aluminum tubes for a variety of processing (flat flower, round flower, craft flower, big flowers, eggs and flower). Machinable the scope of the diameter (Φ12-Φ114mm), thickness (0.3-2mm).		
包装尺寸 Packing Size (mm)	1600×800×100	1800×1100×1200	1850×1500×1300
净重/毛重 N. W. (kg) / G. W. (kg)	1000/1050	2000/2050	3000/3050

# HBAB-PR花纹成型机

## Decorative Pattern Forming Machine

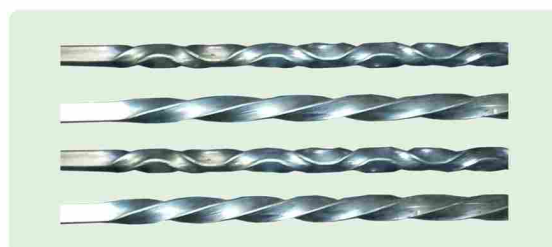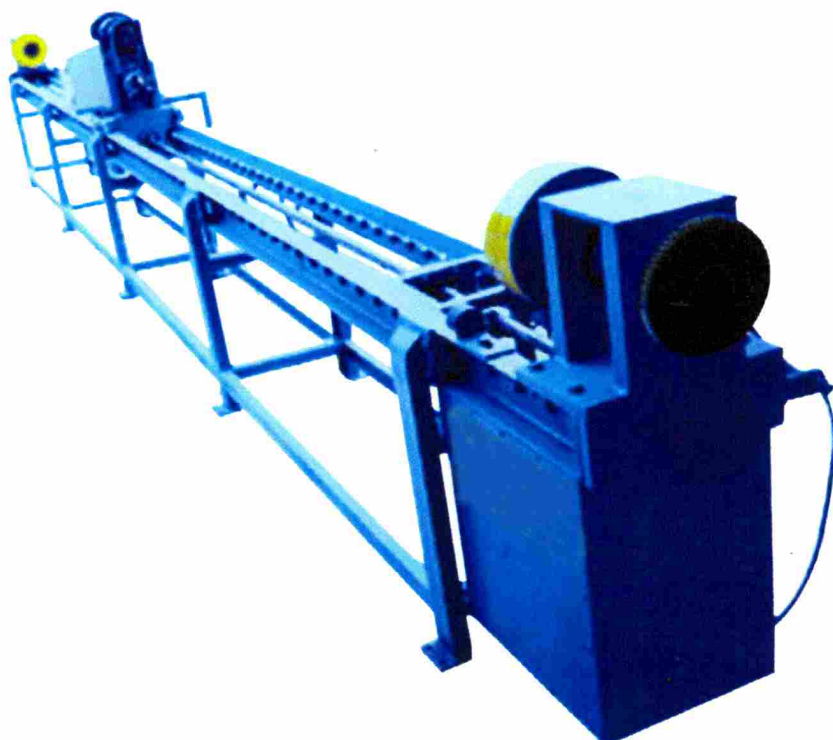


项目Item	25型 (TF-9)	50型 (TF-10)	76型 (TF-11)
加工范围(mm) Processing Range (mm)	Φ16-Φ25	Φ16-Φ50	Φ38-Φ76
工件壁厚 (mm) Work Piece Thickness (mm)	0.3-0.8	0.3-1.2	0.5-1.5
成形长度 (mm) Forming The Length of (mm)	6.0	6.0	6.0
成型时间 (S/次) Forming Time	15	30	60
主电机 (KW) Main Motor (kw)	1.1	1.5	1.2
加工性能 Processing Performance	<p>花纹成型机是铁管、铝管、圆钢的专门机械，具有性价比高，加工成本低，效率高，速度快的特点。</p> <p>Decoration Pattern forming machine is a special machine with iron pipe, aluminum tube and round steel, which has the characteristics of high cost, low processing cost, high efficiency and fast speed.</p>		
主轴中心高度 Spindle Center Height	800	800	800
设备总重 (Kg) Total Weight Of Equipment	1500	1500	1500
尺寸L×W×H (mm) Size L×W×H (mm)	7500×700×1400	7500×700×1400	7500×700×1400



## 多功能十三件套

Multi-Purpose Metalcraft Tool Set in JG Series

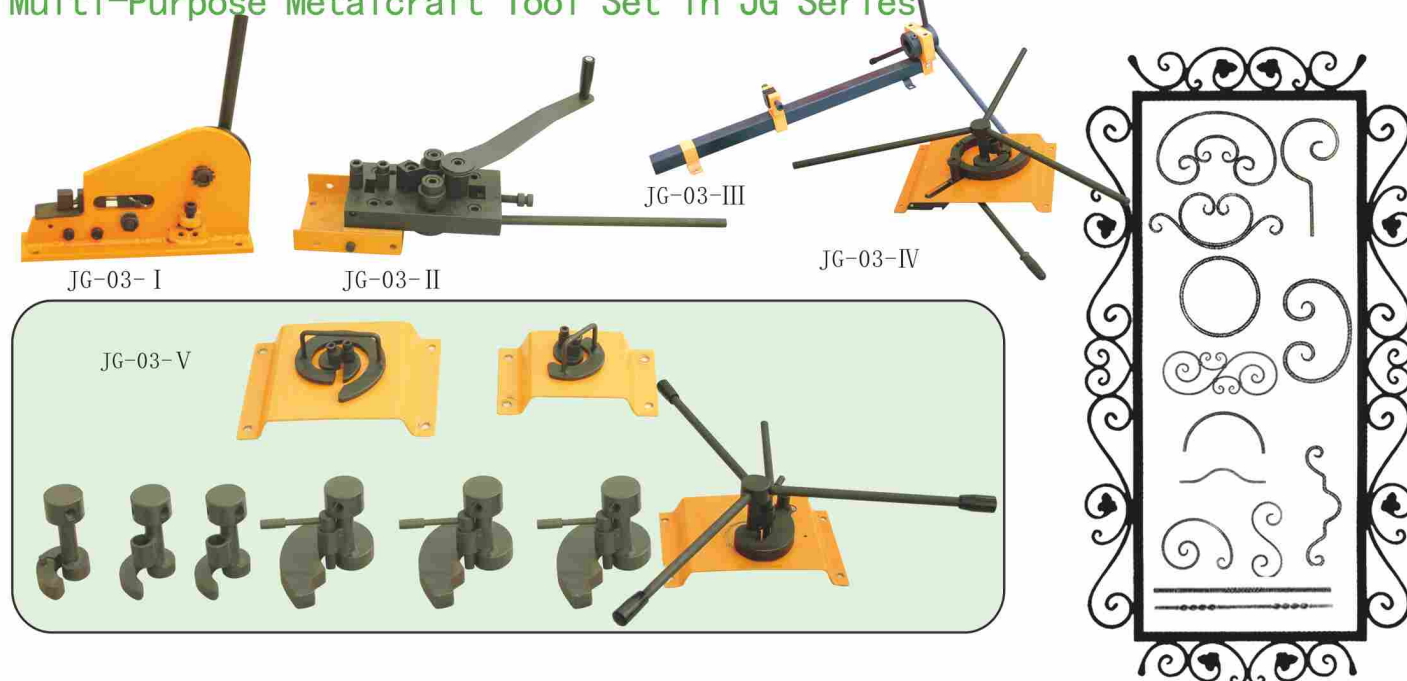

## 手动液压包扣钳

Hydraulic Manual Striking-Button



## 铁砧子

Anvil




## 手动轧条机

Stripe Steel Pressing Machine



## 手动花篮机

Lantern Twisting Machine

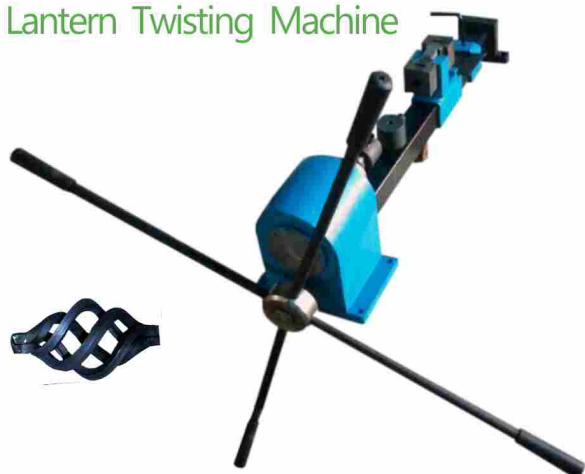

## 卡扣机

Angle-Bending Machine




## 手动弯管机

Circling Machine




## 冷轧压花模具

### Cold Rolling Embossing mold



LZ-BM001 Producing Capacity 10-60mm



LZ-BM005 Producing Capacity 15-50mm



LZ-BM006 Producing Capacity 30-50mm



LZ-BM007 Producing Capacity 20-50mm




LZ-BM008 Producing Capacity 30-50mm



LZ-BM018 Producing Capacity 30-50mm



LZ-BM026 Producing Capacity 20-60mm



LZ-BM035 Producing Capacity 40-50mm



LZ-EM001 Producing Capacity 6-25mm



LZ-EM002 Producing Capacity 6-25mm



LZ-BM041 Producing Capacity 40-50mm




LZ-TM022 Producing Capacity 40-50mm



LZ-TM047 Producing Capacity 3-12mm



LZ-DM001 Producing Capacity 12-50mm



LZ-DM003 Producing Capacity 14-60mm



LZ-DM007 Producing Capacity 30-50mm



LZ-KM001 Producing Capacity 16-20mm